



2025 PRODUCT RANGE

INFLATABLE BIMINIS - INFLATABLE PLATFORMS
ISUP BOARDS - GLASS BOTTOM DINGHYS





SAFE, EASY AND FUN!

*That is how life on board should be,
that is how our products are.*





SIZE XXS  **RIBS & MOTORBOATS:** From 2.5m to 5m length.

SIZE XS  **SAILBOATS:** From 7m to 10m length.
 **RIBS & MOTORBOATS:** From 5m to 7.5m length.



F Front: 1.00 - 1.85 mts.
B Back: 1.00 - 1.85 mts.
L Length: 1.80 mts.
FH Front Height: 1.30 mts.
BH Back Height: 1.30 mts.



F Front: 1.50 - 1.90 mts.
B Back: 1.95 - 2.40 mts.
L Length: 2.10 mts.
FH Front Height: 1.30 mts.
BH Back Height: 1.40 mts.

SIZE S  **SAILBOATS:** From 10m to 15m length.
 **RIBS & MOTORBOATS:** From 7.5m to 11m length.

SIZE S+  **SAILBOATS:** From 14m to 18m length.
 **MOTORBOATS:** From 10m to 13m length.



F Front: 1.95 - 2.30 mts.
B Back: 2.45 - 2.85 mts.
L Length: 2.30 mts.
FH Front Height: 1.40 mts.
BH Back Height: 1.50 mts.




F Front: 2.15 - 2.55 mts.
B Back: 2.80 - 3.20 mts.
L Length: 2.50 mts.
FH Front Height: 1.70 mts.
BH Back Height: 1.55 mts.




SIZE M


 **SAILBOATS:** From 14m to 18m length.
 **MOTORBOATS:** From 10m to 13m length.

SIZE L

 **SAILBOATS:** From 16m to 25m length.
 **MOTORBOATS:** From 13m to 25m length.

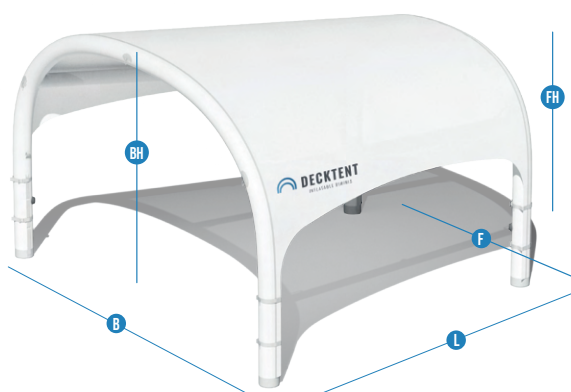

F Front: 1.85 - 2.50 mts.
B Back: 2.80 - 3.40 mts.
L Length: 2.50 mts.
FH Front Height: 2.00 mts.
BH Back Height: 2.25 mts.

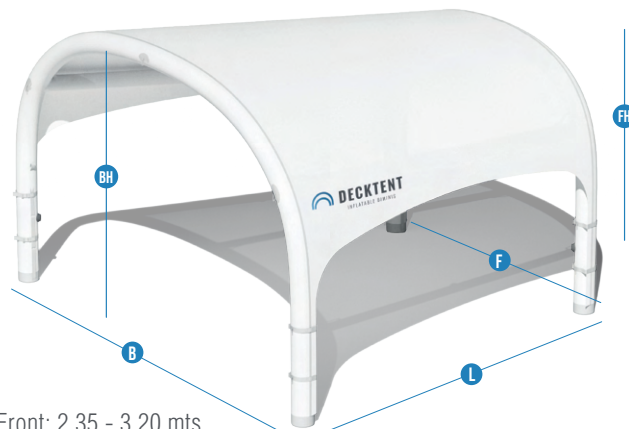

F Front: 2.35 - 3.20 mts.
B Back: 3.35 - 4.00 mts.
L Length: 3.00 mts.
FH Front Height: 2 mts.
BH Back Height: 2.25 mts.

SIZE CHART



RIBS



MOTORBOATS



SAILBOATS

XXS



From 2.5m to 5m length.

From 2.5m to 5m length.

XS



From 5m to 7.5m length.

From 5m to 7.5m length.

From 7m to 10m length.

S



From 7.5m to 11m length.

From 7.5m to 11m length.

From 10m to 15m length.

S+



From 11m to 15m length.

From 11m to 17m length.
 From 18m to 25m length.*
 *Covering the bow sunbed

From 14m to 18m length.

M



From 10m to 13m length.

From 14m to 18m length.

L




From 13m to 25m length.

From 16m to 25m length.



TECHNICAL ASPECTS

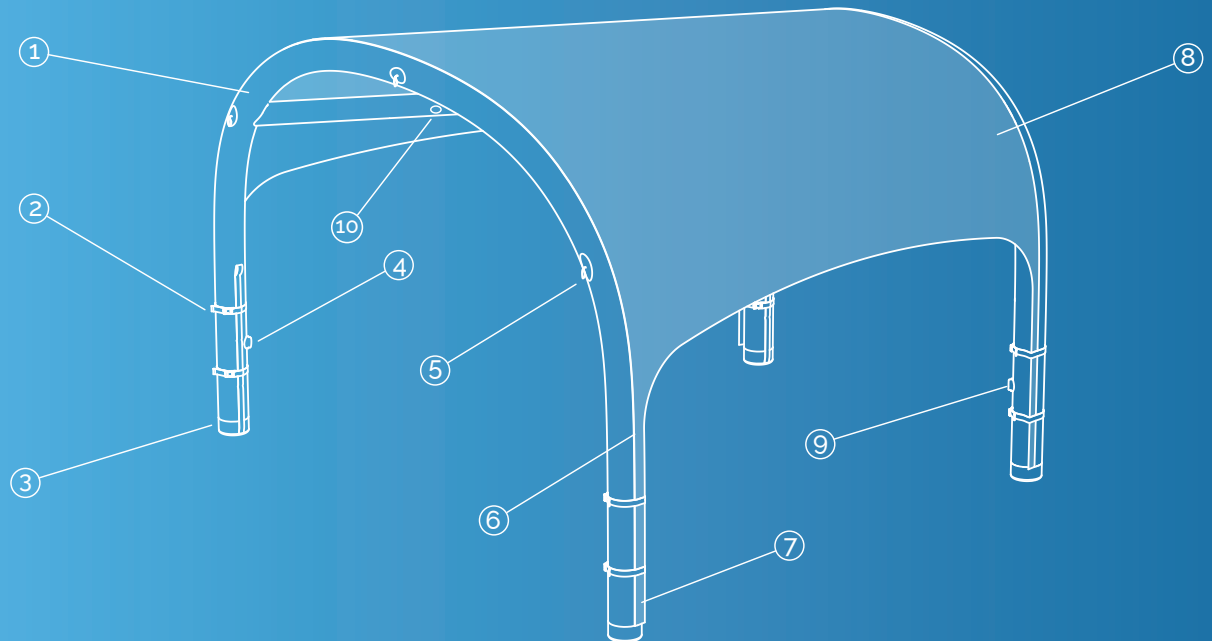

1 - STRUCTURE:
DACRON 600D OUTER FABRIC
THERMO-RETARDANT PE INNER FABRIC
0.25MM TPU INNER CHAMBER
2 - FIXING SYSTEM BY ADJUSTABLE STRAPS
3 - BASES WITH EXTRA DACRON 400D
4 - TWO OVERPRESSURE SAFETY VALVES

5 - FIVE LOOPS FOR SAFETY ROPES FIXATION.
6 - ZIPPERS FOR COMPLETE DISMANTLING
7 - LATERAL ANTI-FRICTION PROTECTION
8 - DACRON 300D TENT WITH UV PROTECTION
9 - 4X UNIVERSAL INFLATION VALVES
10 - 3X EXTRA DEFLATION VALVES



First time
Setup



Can I sail
with it?



How to attach
to the boat?



Decktent.com



DOG RAMP



ADVANTAGES

EASY WATER ACCESS:

Allows your dog to easily get in and out of the water.

COMFORT AND RELAXATION:

Provides a comfortable and stable surface for your dog to rest while enjoying the day.

SAFETY:

Creates a secure space for your dog and reduces the risk of accidental falls.

FOLDABLE FOR EASY STORAGE:

Compact design for hassle-free storage.

VERSATILE USE:

Perfect for boats, docks, pools, and more.

TECHNICAL ASPECTS

MATERIAL:

- 0.9mm UV-resistant PVC.
- Non-slip EVA traction pad.
- 1 Mesh ladder.
- 2.3mm internal drop-stitch construction.
- 2 Stainless steel D-Rings.
- 2 x 1.5m fastening straps.
- 4 Soft handles.

INCLUDED ACCESSORIES:

Manual pump, carrying bag, repair kit, strap, and mooring ropes.

TWO SIZES

DOG RAMP L:

Dimensions: 150 x 100 x 15cm
Suitable for dogs of all breeds up to 50 kg.
Color: White and orange
Inflation Pressure: 5 PSI

DOG RAMP M:

Dimensions: 120 x 80 x 15cm
Suitable for dogs of all breeds up to 35 kg.
Color: White and orange
Inflation Pressure: 5 PSI



INFLATABLE PLATFORMS

STANDARD PLATFORMS



TECHNICAL ASPECTS

Drop stitch 2,3mm.
UV resistant 0,9mm PVC.
Inflation pressure: 5 PSI.
20cm double layer.
8 Soft handles.
4 Stainless steel D-rings.
4 Ballast bags.
2 Inflation/deflation valves.
1 Soft ladder.
Anti slip EVA deck.
Edge colours: White.

AVAILABLE IN TWO SIZES
PLATFORM 300 x 200cm
PLATFORM 250 x 150cm

INCLUDED ACCESSORIES:
Electric pump, belt and repair kit.

SUPPLATFORM



TECHNICAL ASPECTS


Drop stitch 2,3mm.
UV resistant 0,9mm PVC.
Inflation pressure: 5 PSI.
20cm double layer.
1 Soft ladder.
Anti slip EVA deck.
5 Stainless steel D-Rings.
2 x 1.5m fastening straps.
Edge colour: White.

AVAILABLE IN ONE SIZE
SUPPLATFORM 200 x 100cm

INCLUDED ACCESSORIES:
3 pieces paddle, manual pump, belt and repair kit.



FUN PLATFORM

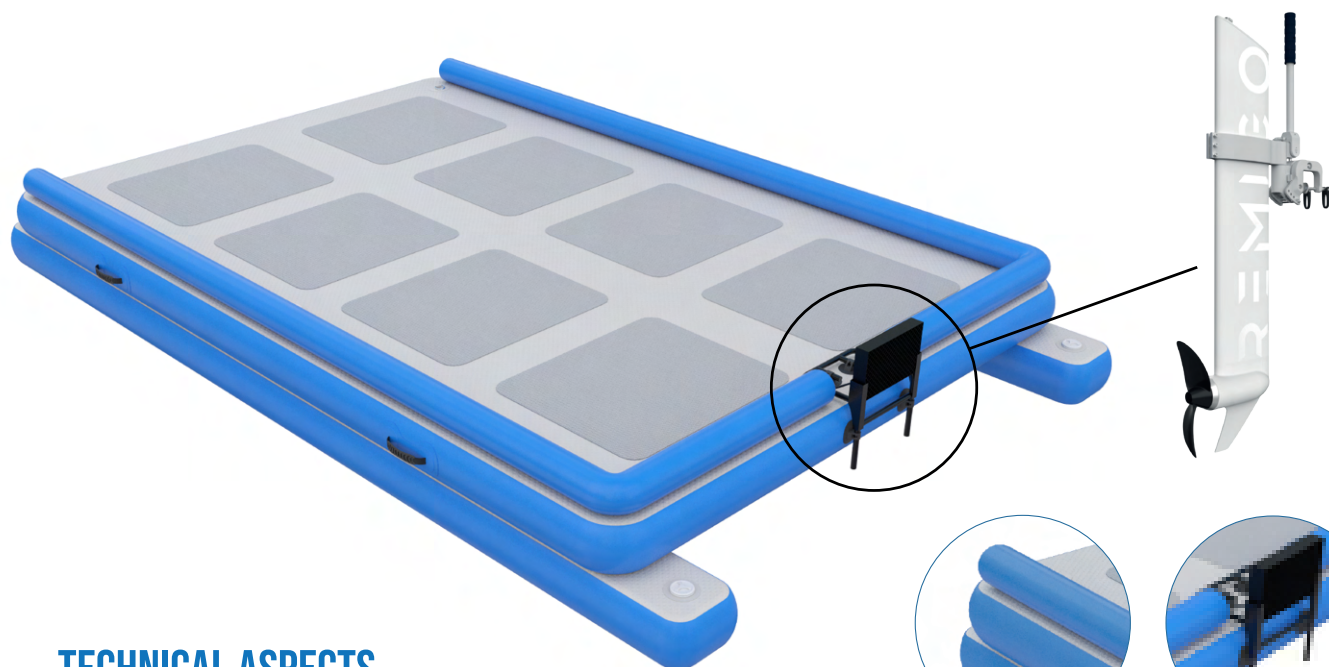


TECHNICAL ASPECTS

AVAILABLE IN TWO SIZES: 300 X 200 CM AND 250 X 200 CM


15cm double layer drop stitch 2,3mm.
 UV resistant PVC 0,9mm.
 Motor mount kit.
 15 x 15cm Inflatable protective railing.
 2 Stabilizing fins.
 Anti-slip pads.
 4 Soft handles.
 Stainless steel D-Rings.

INCLUDED ACCESSORIES:


Electric pump, soft ladder, carrying bag and repair kit.




SAFETY RAILING




ENGINE SUPPORT



HANDLES



VALVE



ANTI-SLIP PADS



WATER LOUNGES

CIRCULAR



SQUARED



TECHNICAL ASPECTS

CIRCULAR WATER LOUNGE

Foldable circular lounge with mesh center.
Diameter: 250cm

CONSTRUCTION:

UV resistant 0,9mm PVC.
2.3mm drop stitch inner construction.
2 Reinforced grab handles.
2 Stainless steel D-rings.

INCLUDED ACCESSORIES:

Electric pump, carrying bag, repair kit and ropes.

TECHNICAL ASPECTS

SQUARED WATER LOUNGE

Foldable squared lounge with mesh center.
250 x 250cm

CONSTRUCTION:

DWF UV resistant PVC + EVA teak.
Drop stitch inner construction.
8 Grab handles.
4 Drink holders.
Stainless steel D-rings.

INCLUDED ACCESSORIES:

Electric pump, carrying bag, repair kit and ropes.





JET SKI DOCKS

T DOCK



TECHNICAL ASPECTS

OPEN JET SKI DOCK 240 X 240 X 20 CM

6 Stainless steel D-rings.
Inflation pressure: 7 PSI

MATERIAL:

0.9mm UV resistant PVC.
2.3mm drop stitch internal construction.
Non-slip teak EVA surface.

INCLUDED ACCESSORIES:

Manual pump, carrying bag, repair kit, and strap.

E DOCK



TECHNICAL ASPECTS

JET SKI DOCK 430 X 230 X 20 CM

4 Reinforced grab handles.
12 Stainless steel D-rings.
Inflation pressure: 7 PSI

MATERIAL:

0.9mm UV resistant PVC.
2.3mm drop stitch internal construction.
Non-slip teak EVA surface.

INCLUDED ACCESSORIES:

Manual pump, carrying bag, repair kit, and strap.




INFLATABLE SUP BOARDS

SIZE 10' 6" X 32" X 6"



MATERIALS: DOUBLE WALL FABRIC

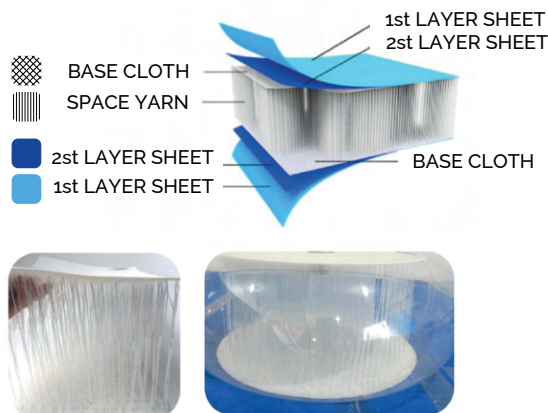

SIZE 9' 6" X 32" X 6"




INCLUDED: Bag, Hand pump, Leash, 3 pieces paddle, Fins, Belt, Repair kit.


TECHNICAL ASPECTS

2.3mm Double layer Reinforced drop stitch.
 1,2mm double layer heavy duty UV resistant PVC tarpaulin.
 TPU totally hand made for drop stitching material.
 304 Stainless steel 2.5 cm and 6cm big D-ring system.
 High pressure halkey roberts bravo valve.
 Special for anti corrosion made handle.
 Soft handle same material as car safety belt.
 Multi-color screen printing.
 Advanced UV printing technology.
 Inflation pressure: 11 PSI



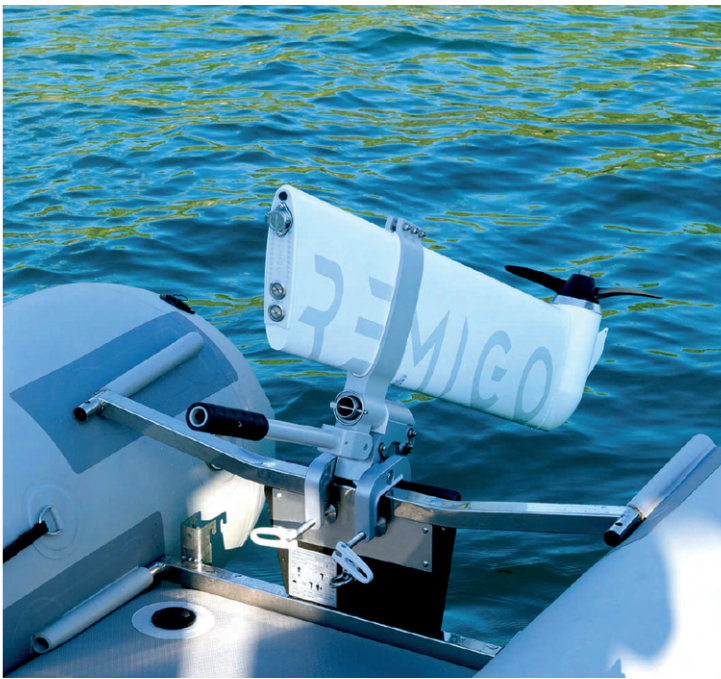

REMIGO ELECTRIC MOTOR

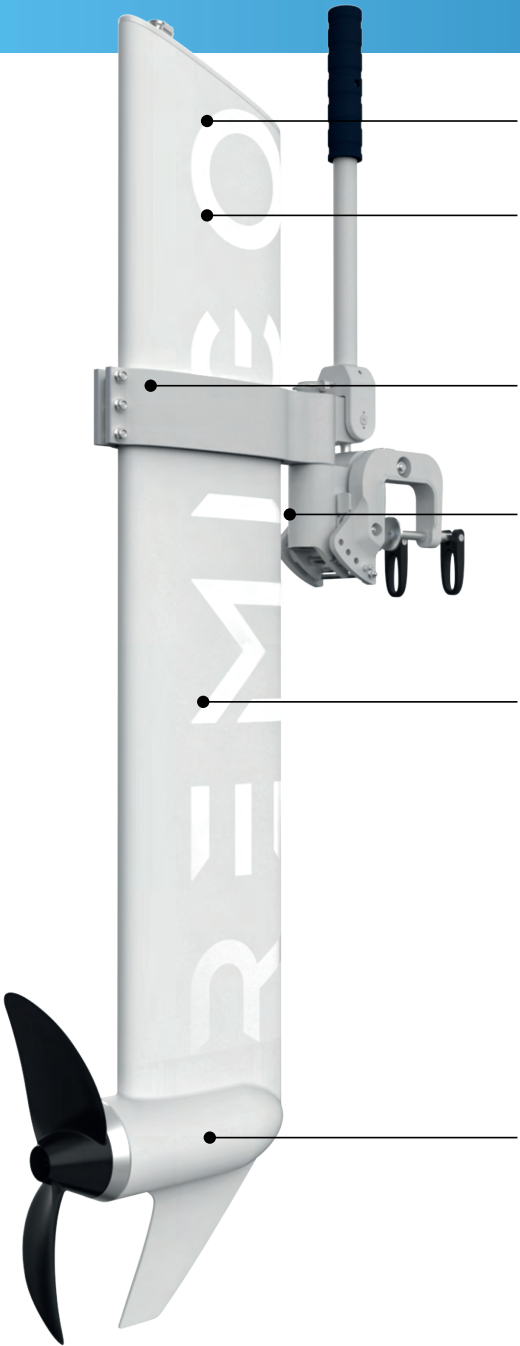

- Interface with 2-button power control module
- Waterproof aluminum casing with integrated 1085 Wh Li-Ion battery and a smart battery management module
- Shaft length adjustment from S to XL size in one model
- 2-part bracket makes it possible to mount or remove the outboard easily and safely
- Reflective decals for night visibility
- Highly efficient 1000 W electric brushless DC motor, comparable to 3 HP (30 kg of thrust)
- Propels any boat up to 7m or 1.5 tonne

TECHNICAL ASPECTS

STANDARD PACKAGE:
1000W RemigoOne Electric Outboard Motor.
Mounting bracket (transom + tiller bracket).
Standard AC RemigoOne charger (5A).
2x RemigoOne Magnetic Key.
Set of tools for height/shaft length adjustment +
1x spare propeller pin.
User manual.
Warranty certificate.

PERFORMANCE

	speed in knots (km/h)	NM range (km)
eco	2.0 (3.7)	30.0 (55.0)
cruise	3.0 (5.5)	14.0 (25.6)
full speed	5.0 (9.2)	4.9 (9.1)





GLASS BOTTOM DINGHY “FORMENTERA”



MODEL	Length (cm)	With (cm)	Diameter (cm)	Chamber	Max.Power (HP)	Max. Capacity (person)	Max. Load (kg)
FORMENTERA - 230 PC	230	134	37	3	4	👤👤	350
FORMENTERA - 270 PC	270	154	42	3	8	👤👤👤	480
FORMENTERA - 330 PC	330	156	42	3	15	👤👤👤👤	540

CONSTRUCTION:
3 chambers high quality UV resistant 0,9mm PVC.
5mm extra resistant polycarbonate.
Stainless steel D-ring structure.

STANDARD EQUIPMENT INCLUDED:
2 Piece Aluminum Oars, 1 Marine Grade Plywood Seat, 1 Foot Pump, 1 Repair Kit.







FINALLY STAYING COOL ON BOARD

CONTACT:



+34 609 777 900



facebook.com/decktent



instagram.com/decktent



www.decktent.com



enjoy@decktent.com